

ACI 100 mini

New !

Overview

Descripción general

The ACI 100 mini fan is designed to exhaust or supply air in environments. Very compact and low noise, can also be used to reinforce long line installations. Only 26 watts !

El ACI 100 mini está diseñada para extraer o suministrar aire en entornos. Compacto y silencioso, también es utilizado como refuerzo para instalaciones de gran longitud. Consume solamente 26 watts !



Highlights

Destacques

- Acting along the duct
- Connection Box
- High pressure, high flow and low noise
- 03 years warranty
- Vertical or horizontal installation
- Working airstreams up to 140°F
- Aluminum Body
- Ball Bearing Motors dynamically balanced
- IP 44
- 60 Hz
- Safety Thermal Overload Protection
- Ultra compact



Features x Benefits

Características x Beneficios

FEATURES	BENEFITS
Aluminium Body	More lighter product, easy to install
Embedded support	Faster installation
Power Cord Included	Power Cord goes together in the box, option to use or use hard wire

Specifications


Técnico

Model	Nom. RPM	Volts	Max. Watts	CFM x Static Pressure (SP) Ins. WG						Max. SP	Duct Diameter
				0"	0.125"	0.25"	0.375"	0.5"	0.75"		
ACI 100 mini	3000	115	26	130	115	98	86	70	32	0.86	4"

Performance is for installation ducted inlet, ducted outlet without accessories. RPM is nominal. There are no information about sound levels, because remote monted fan noise levels it depends on the following variables: fan distance from the intake source, length and type of duct and other factors.

Dimensions

Dimensiones

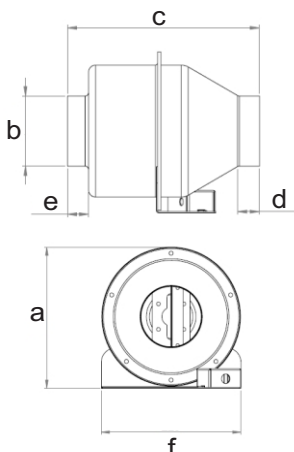

MODELO Type	Dimensional / Dimensions (mm / inches)						Weight (Kg / lbs)
	a	b	c	d	e	f	
ACI 100 mini	227 8 15/16	99 3 57/64	273 10 3/4	30 1 3/16	30 1 3/16	225 8 55/64	1,8 3,96



www.sicflux.com - sales@sicflux.com